



The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

**RECEIVED**

FEB X 2 2001


Technology Center 2600

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

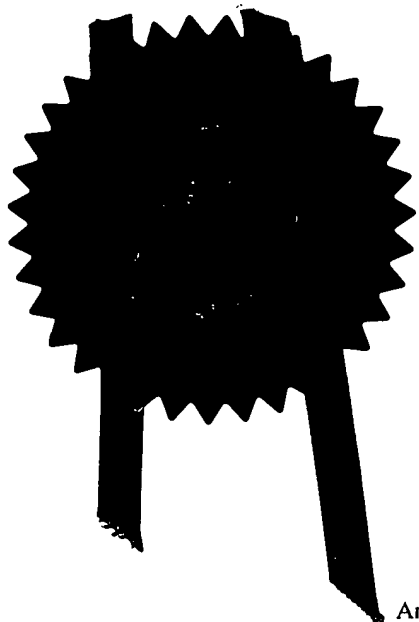

Signed

Dated

13 OCT 2000

**CERTIFIED COPY OF  
PRIORITY DOCUMENT**



2642  
PATENT

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE •

In re application of: Popovic et al.

Attorney Docket No.: SMC1P009/80611528

Application No.: 09/662,259

Examiner: Unknown

Filed: September 14, 2000

Group: 2642

Title: LOCATING NETWORK ECHOS

RECEIVED

FEB X 2 2001

Technology Center 2600

#6  
J. Kuy  
5/5/01

CERTIFICATE OF MAILING

I hereby certify that this correspondence is being deposited with the United States Postal Service as First Class Mail to: Assistant Commissioner for Patents, Washington, DC 20231 on January 25, 2001.

Signed:

  
Kristina Gomez

TRANSMITTAL OF CERTIFIED PRIORITY DOCUMENTS

Assistant Commissioner for Patents  
Washington, D.C. 20231

Sir:

Transmitted herewith is the certified copy of the priority document for the above-referenced patent application, LOCATING NETWORK ECHOS, Patent Application No. 09/662,259.

The Commissioner is authorized to charge any fees that may be due to Deposit Account No. 500388 (Order No. SMC1P009).

Respectfully submitted,

BEYER WEAVER & THOMAS, LLP



C. Douglass Thomas  
Registration No. 32,947

P.O. Box 778  
Berkeley, CA 94704-0778

THE PATENT OFFICE

F

14 SEP 1999

RECEIVED BY POST

14SEP99 E476321-1 D00239  
P01/7700 0.00 - 9921555.0

The Patent Office

Cardiff Road  
Newport  
Gwent NP9 1RH

# Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

1. Your reference

RSN/ME/P10036GB

2. Patent app.

(The Patent

9921555.0

14 SEP 1999

3. Full name, address and postcode of the or of each applicant (underline all surnames)

MITEL CORPORATION,  
350 LEGGET DRIVE,  
PO BOX 13089,  
KANATA, ONTARIO,  
K2K 2W7, CANADA

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

ONTARIO, CANADA

607630006

4. Title of the invention

LOCATING NETWORK ECHOS

5. Name of your agent (if you have one)

CRUIKSHANK & FAIRWEATHER,  
19 ROYAL EXCHANGE SQUARE,  
GLASGOW G1 3AE,  
UNITED KINGDOM

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

Patents ADP number (if you know it)

547002

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number  
(if you know it)

Date of filing  
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing  
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

YES

a) any applicant named in part 3 is not an inventor, or

b) there is an inventor who is not named as an applicant, or

c) any named applicant is a corporate body.

See note (d))

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document.

Continuation sheets of this form

Description	5
Claim(s)	2
Abstract	1
Drawing(s)	2

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77) 1

Request for preliminary examination and search (Patents Form 9/77) 1

Request for substantive examination (Patents Form 10/77)

Any other documents (please specify)

11. I/We request the grant of a patent on the basis of this application.

Signature

*Richard P. Fairweather* Date

CRUIKSHANK & FAIRWEATHER 13/09/99

12. Name and daytime telephone number of person to contact in the United Kingdom

Dr. R.S. Naismith  
0141-221 5767

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

**Field of the Invention**

The present invention relates generally to communication networks and in particular to an echo cancelling system and method for cancelling echos in a communication path.

5

**Background of the Invention**

Echo cancellers to cancel echos in a communication path are well known. A typical echo canceller generates a filter that models the transfer function of the echo signal path using a linear algorithm such as a least-mean-squared (LMS) algorithm. Network signals conveyed to the echo signal path are also conveyed to the echo canceller. The filter therein processes the network signals to generate an estimated copy of echo signals received from the echo signal path. The estimated echo signals and actual echo signals received from the echo signal path are subtracted. Differences between the estimated echo signals and the actual echo signals result in error signals, which are fed back to the echo canceller so that the echo canceller can converge to the correct transfer function.

10  
15

When dealing with long delay networks, the echo signal path can change and can be different from call to call. As a result, an adaptive algorithm is required to allow the echo canceller to model adaptively the echo signal path. Unfortunately, the longer the time window or delay of the echo signals that are required to be cancelled, the longer the adaptive algorithm takes to adapt to the correct transfer function.

20

In addition, as the total time window increases, the number of coefficients in the filter generated by the adaptive algorithm increases, requiring more processing power. Placing conventional echo cancellers in long delay networks to cancel echos from traditional networks such as public switched telephone networks (PSTNs) or private branch exchanges (PBXs) increases the complexity and cost significantly.

25

It is therefore an object of the present invention to provide a novel echo cancelling system and method and a novel echo locator.

30

**Summary of the Invention**

In accordance with one aspect of the present invention there is provided an echo cancelling system for cancelling echoes in a communication path comprising:

5                    an echo locator coupled to said communication path to locate the positions of echo signals received from said communication path; and

                  an echo canceller coupled to said communication path to cancel echo signals received therefrom, said echo canceller becoming active in regions corresponding to the positions of echo signals in response to said echo locator.

10                   In accordance with another aspect of the present invention there is provided a method of cancelling echoes in a communication path comprising the steps:

                  locating the positions of echo signals in said communication path; and  
                  activating an echo canceller only in regions corresponding to the  
15                   positions of the echo signals thereby to cancel echoes in said communication path.

In accordance with yet another aspect of the invention there is provided an echo locator to locate echoes in a communication path comprising:

                  a first downsampler downsampling signals transmitted to said communication path and generating downsampled reference signals;

20                   a second downsampler downsampling return signals received from said communication path and generating downsampled return signals; and

                  an adaptive filter generating an aliased transfer function approximating that of said communication path to produce aliased estimated return signals in response to said downsampled reference signals, said adaptive filter subtracting the  
25                   aliased estimated return signals from said downsampled return signals to generate error signals, said error signals being fed back to said adaptive filter to adjust the transfer function thereof, said adaptive filter generating output corresponding to peaks in said transfer function thereby to signify the location of echoes in said return signals.

30                   The present invention provides advantages in that since the position of echos in the echo signal time window are determined, the echo canceller can be made active only in those areas in the time window. As a result, a reduced number of filter

coefficients used to generate the filter modeling the echo signal path need to be active. This allows the echo canceller to adapt faster to changes in the echo signal path. In addition, by reducing the number of active filter coefficients, fewer processing cycles are required to generate the filter. Furthermore, the echo canceller is more robust in  
5 adverse conditions.

### **Brief Descriptions of the Drawing**

An embodiment of the present invention will now be described more fully with reference to the accompanying drawings in which:

10                   Figure 1 is a schematic diagram of a conventional prior art echo canceller;

                  Figure 2 is a schematic diagram of an echo canceller and echo locator in accordance with the present invention;

                  Figure 3 is a schematic diagram of the echo locator of Figure 2; and

15                   Figure 4 is a graph showing an echo signal received from an echo signal path.

### **Detailed Description of the Preferred Embodiment**

Turning now to Figure 1, a conventional echo canceller in parallel with  
20 a communication path 12 in which echo signals are generated is shown and is generally indicated to by reference numeral 10. The echo canceller 10 generates a filter modeling the transfer function of the echo signal path using a least-mean-squared (LMS) algorithm so that the echo canceller generates estimated echo signals that are the same as the echo signals received from the communication path 12. The  
25 estimated echo signals are subtracted 14 from the actual echo signals in an attempt to cancel the echo signals. The amount of cancellation is commonly referred to as ERLE. Differences between the estimated echo signals and the actual echo signals result in error signals. The error signals are fed back to the echo canceller 10 so that the echo canceller can attempt to converge to the correct transfer function and  
30 generate a filter which more closely models the echo signal path.

As mentioned previously, the algorithm executed by the echo canceller 10 takes longer to converge to the correct transfer function as the time window of

echo signals received from the communication path 12 increases. As a result, echo signals pass through the echo canceller 10.

To deal with the above, a network echo locator 30 in accordance with the present invention is provided and is used in conjunction with an echo canceller 32.

5 As can be seen in Figure 2, the echo locator 30 is in parallel with the echo canceller 32. The echo locator 30 provides input to the echo canceller 32 which is used by the echo canceller to limit the number of active filter coefficients or taps during generation of the filter modeling the communication path 34.

Turning now to Figure 3, the echo signal locator 30 is better illustrated.  
10 As can be seen, the echo locator 30 includes a downsampler 40 receiving reference signals transmitted to the communication path 34 and downsampler 42 receiving return signals from the communication path 34. The downsampler 40 downsamples the transmitted reference signals by a factor of M without a downsampling filter while the downsampler 42 downsamples the return signals by the same factor of M without  
15 a downsampling filter. An adaptive filter 44 receives the downsampled reference and return signals and includes an LMS processor 46 executing an LMS algorithm. The LMS algorithm generates an aliased transfer function modelling the communication path 34 and processes the downsampled reference signals to produce estimated downsampled return signals. The estimated downsampled return signals are  
20 subtracted (block 48) from the downsampled return signals to generate feedback error signals 49, which are used to adjust the transfer function. The LMS processor 46 generates output signals corresponding to the peaks in the transfer function, which are conveyed to the echo canceller 32 to activate selected filter coefficients thereof.

The peaks in the aliased transfer function of the echo locator 30  
25 represent the areas of active echoes in the communication path 34. Only these areas need to be active in the echo canceller 32 in order to cancel the echoes. For example, if  $M=4$  and the peaks in the aliased transfer function of the LMS processor 42 are at positions 3, 4 and 5 and 10, 11, and 12, then the filter coefficients or taps in the LMS algorithm of the echo canceller 32 which need to be made active by the echo locator  
30 are:

$$\begin{aligned} &3 \times M = 12 \text{ up to } 5 \times M = 20; \text{ and} \\ &10 \times M = 40 \text{ up to } 12 \times M = 48. \end{aligned}$$



The remaining taps of the echo canceller are considered to be equal to zero and do not need to be used in the adaptation calculation or filtering of the echo canceller.

5 If desired, a weighting function can be applied to the taps in the echo canceller 32 based on the magnitude of the peaks in the aliased transfer function of the echo locator 30. In this case, higher peaks in the transfer function of the echo  
locator result in higher weightings applied to the corresponding taps in the echo canceller.

Turning now to Figure 4, a time window 50 for an echo signal is shown. As can be seen, within the time window, echo signals 52 are present in only  
10 two locations within the time window. In a conventional echo signal canceller, the filter generated by the echo canceller will be active over the entire time window. However, through use of the echo locator of the present invention, the echo canceller, which is responsive to the echo locator, is only active in the regions within the time window in which echo signals are present.

15 Although a preferred embodiment of the present invention has been described, those of skill in the art will appreciate that variations and modifications may be made without departing from the spirit and scope thereof as defined by the appended claims.

**We Claim:**


1. An echo cancelling system for cancelling echoes in a communication path comprising:  
5 an echo locator coupled to said communication path to locate the positions of echo signals received from said communication path; and  
an echo canceller coupled to said communication path to cancel echo signals received therefrom, said echo canceller becoming active in regions corresponding to the positions of echo signals in response to said echo locator.  
10
2. An echo cancelling system as defined in Claim 1, wherein said echo canceller includes a first adaptive filter including selectable filter coefficients, said echo locator activating selected filter coefficients of said first adaptive filter corresponding to the positions of echo signals received from said communication  
15 path.
3. An echo cancelling system as defined in Claim 2, wherein said echo locator includes a second adaptive filter generating an aliased transfer function approximating that of said communication path, peaks in said transfer function being  
20 used by said echo locator to activate said selected filter coefficients.
4. An echo cancelling system as defined in Claim 3 wherein said echo locator generates output signals corresponding to peaks in said transfer function, said output signals being applied to said echo canceller to activate selected filter  
25 coefficients corresponding to said peaks, the magnitude of said output signals being dependent on the magnitude of said peaks.
5. An echo cancelling system as defined in Claim 4 wherein said first and second adaptive filters are LMS adaptive filters.  
30
6. A method of cancelling echoes in a communication path comprising the steps:

locating the positions of echo signals in said communication path; and  
activating an echo canceller only in regions corresponding to the  
positions of the echo signals thereby to cancel echoes in said communication path.

- 5     7.             The method of Claim 6 wherein said activating step further includes  
the step of activating selected filter coefficients of an adaptive filter in said echo  
canceller corresponding to the position of echo signals received from said  
communication path.
- 10    8.             The method of Claim 7 further comprising the step of weighting the  
selected filter coefficients in dependence of the magnitude of echo signals received  
from said communication path.
- 15    9.             An echo locator to locate echoes in a communication path comprising:  
a first downsampler downsampling signals transmitted to said  
communication path and generating downsampled reference signals;  
a second downsampler downsampling return signals received from said  
communication path and generating downsampled return signals; and  
an adaptive filter generating an aliased transfer function approximating  
20    that of said communication path to produce aliased estimated return signals in  
response to said downsampled reference signals, said adaptive filter subtracting the  
aliased estimated return signals from said downsampled return signals to generate  
error signals, said error signals being fed back to said adaptive filter to adjust the  
transfer function thereof, said adaptive filter generating output corresponding to peaks  
25    in said transfer function thereby to signify the location of echoes in said return  
signals.
10.             An echo locator as defined in Claim 9 wherein said adaptive filter is an  
LMS adaptive filter.

**ABSTRACT**

5      An echo cancelling system for cancelling echoes in a communication path includes an echo locator and an echo canceller. The echo locator is coupled to the communication path and locates the positions of echo signals received from the communication path. The echo canceller is also coupled to the communication path and cancels echo signals received therefrom. During echo cancellation, the echo canceller becomes active in regions corresponding to the positions of echo signals in response to the echo locator.

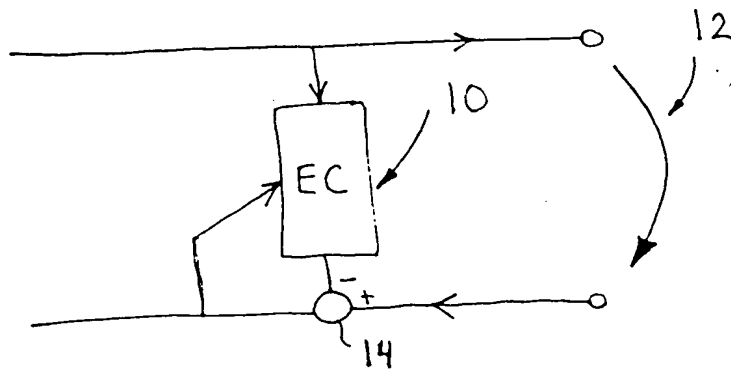

(Prior Art)

Fig. 1

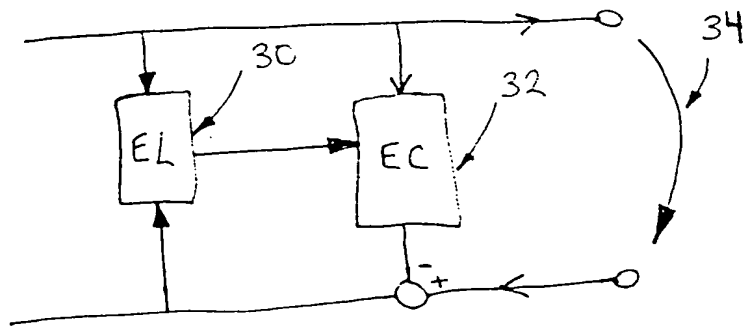


Fig. 2

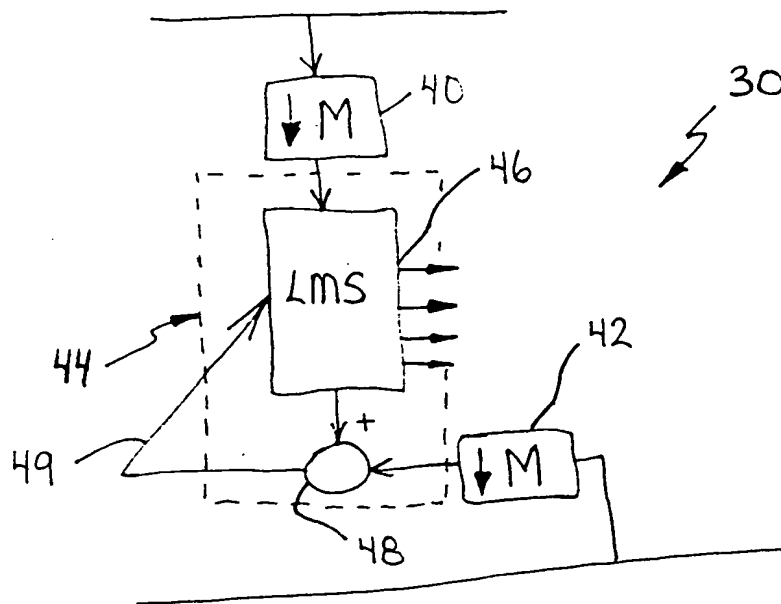


Fig. 3

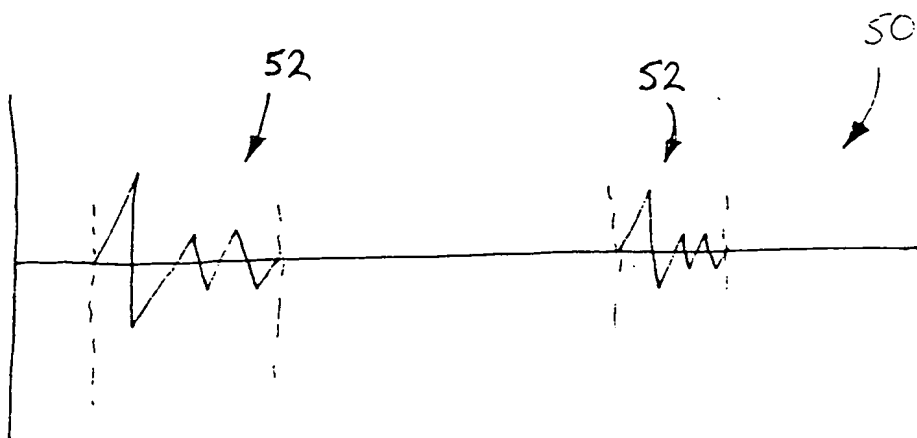


Fig. 4